

# REPLACING THE TRACK AND/OR RUBBER GASKET



You should have a wheel front, back, (2) rubber gaskets and a track.

You will need a butter knife to install the gasket which holds the track in place.

## Replacing Track

\*Remove both rubber gaskets before trying to put it back together.

## Fixing Current Track

\*Front Rim? Remove track and gaskets from the front and back. Easier to install doing front first.

### Step 1



Lay the front cover/ring so groove faces up.

The track needs installed in the front before placing the track into the back of the wheel.



Close up of groove in the front ring

### Step 2




Insert track into the ring's groove, finger press the gasket on the inside of the track. Use the 3, 6, 9, 12 positions to center gasket and then work your way around the track. Make sure the track is firmly in the groove.



Close up of the track in groove/ring

### Step 3

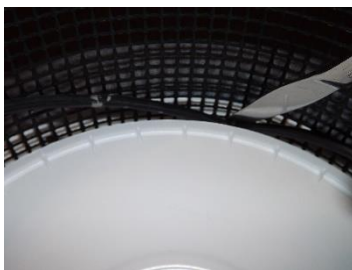

Lay the back on your lap, put the front & track into the groove. Follow Step 2 directions to complete installation.



Assembled and ready to use!